

SILICON DUAL NPN TRANSISTOR

| Contral | |
|------------|--|
| TO-78 CASE | |

Central Semiconductor Corp.

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N2060M is a silicon dual NPN transistor utilizing two individual chips mounted in a hermetically sealed metal case designed for differential amplifier applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

| MAAINOW NATINGS. (1A-25 C utiless otherwise | e noteu) | | |
|---|------------------|-------------|-------|
| | SYMBOL | | UNITS |
| Collector-Base Voltage | V _{CBO} | 100 | V |
| Collector-Emitter Voltage | VCER | 80 | V |
| Collector-Emitter Voltage | VCEO | 60 | V |
| Emitter-Base Voltage | V _{EBO} | 7.0 | V |
| Continuous Collector Current | ΙC | 500 | mA |
| Power Dissipation (One Die) | PD | 500 | mW |
| Power Dissipation (Both Dice) | PD | 600 | mW |
| Power Dissipation (One Die, T _C =25°C) | PD | 1.5 | W |
| Power Dissipation (Both Dice, T _C =25°C) | PD | 3.0 | W |
| Operating and Storage Junction Temperature | TJ, Tstg | -65 to +200 | °C |
| | | | |

ELECTRICAL CHARACTERISTICS PER TRANSISTOR: (T_A=25°C unless otherwise noted)

| SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|----------------------|--|-----|-----|-------|
| I _{СВО} | V _{CB} =80V | | 2.0 | nA |
| IEBO | V _{EB} =5.0V | | 2.0 | nA |
| BVCBO | Ι _C =100μΑ | 100 | | V |
| BVCER | I _C =10mA, R _{BE} =10Ω | 80 | | V |
| BVCEO | I _C =30mA | 60 | | V |
| BVEBO | Ι _Ε =100μΑ | 7.0 | | V |
| V _{CE(SAT)} | I _C =50mA, I _B =5.0mA | | 1.2 | V |
| V _{BE(SAT)} | I _C =50mA, I _B =5.0mA | | 0.9 | V |
| h _{FE} `´´ | V _{CE} =5.0V, Ι _C =10μΑ | 25 | 150 | |
| h _{FE} | V _{CE} =5.0V, Ι _C =100μΑ | 30 | 150 | |
| h _{FE} | V _{CE} =5.0V, I _C =1.0mA | 40 | 150 | |
| h _{FE} | V _{CE} =5.0V, I _C =10mA | 50 | 200 | |
| fт | V _{CE} =10V, I _C =50mA, f=20MHz | 60 | | MHz |
| Cob | V _{CB} =10V, I _E =0, f=1.0MHz | | 15 | pF |
| C _{ib} | V _{BE} =0.5V, I _C =0, f=1.0MHz | | 85 | pF |
| NF | V _{CE} =10V, I _C =300μA, R _S =510Ω, | | | |
| | f=1.0kHz, BW=200Hz | | 8.0 | dB |
| | | | | |

R1 (2-December 2013)



UNITS

mV


mV

2N2060M

SILICON DUAL NPN TRANSISTOR

MATCHING CHARACTERISTICS - Continued: (T_A=25°C unless otherwise noted) SYMBOL TEST CONDITIONS MIN MAX hFE1/hFE2 (Note 1) V_{CE}=5.0V, I_C=100µA 0.9 1.0 hFE1/hFE2 (Note 1) V_{CE}=5.0V, I_C=1.0mA 0.9 1.0 |V_{BE1}-V_{BE2}| V_{CE}=5.0V, I_C=100µA 5.0

TO-78 CASE - MECHANICAL OUTLINE

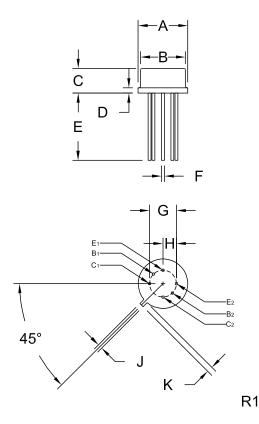

| DIMENSIONS | | | | |
|------------------|--------|-------|--------|-------|
| | INCHES | | MILLIM | ETERS |
| SYMBOL | MIN | MAX | MIN | MAX |
| A (DIA) | 0.335 | 0.370 | 8.51 | 9.40 |
| B (DIA) | 0.305 | 0.335 | 7.75 | 8.51 |
| С | 0.150 | 0.185 | 3.81 | 4.70 |
| D | - | 0.040 | - | 1.02 |
| E | 0.500 | - | 12.70 | - |
| F (DIA) | 0.016 | 0.021 | 0.41 | 0.53 |
| G | 0.200 | | 5. | 08 |
| Н | 0.100 | | 2. | 54 |
| J | 0.028 | 0.034 | 0.71 | 0.86 |
| K | 0.029 | 0.045 | 0.74 | 1.14 |
| TO 70 (DE)/: D1) | | | | |

5.0

TO-78 (REV: R1)

MARKING: FULL PART NUMBER

R1 (2-December 2013)

www.centralsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- · Consolidated shipping options

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

ss your design challenges.

· Custom product packing

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits

Custom bar coding for shipments

Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>





http://www.centralsemi.com

Product End of Life Notification

| PDN ID: | PDN01061 |
|--------------------|----------|
| Notification Date: | 1/17/17 |
| Last Buy Date: | 7/17/17 |
| Last Shipment Date | 1/17/18 |

Summary: All transistors manufactured in the TO-78 package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

| Central Part Number | Replacement | |
|---------------------|--------------------|--|
| CEN876 | N/A | |
| CEN894 | N/A | |
| CEN895 | N/A | |
| CEN896 | N/A | |
| CEN911 | N/A | |
| CEN947 | N/A | |
| CEN955 W/DATA | N/A | |
| MD2219A | N/A | |
| MD2369 | N/A | |
| MD2369A | N/A | |
| MD2369B | N/A | |
| MD2905 | N/A | |
| MD2905A | N/A | |
| MD5179 | N/A | |
| MD7000 | N/A | |
| MD7001 | N/A | |
| MD7003 | N/A | |
| MD7003A | N/A | |
| MD7003B | N/A | |
| MD8002 | N/A | |
| MD8003 | N/A | |
| MD918 | N/A | |
| MD918A | N/A | |
| MD918B | N/A | |
| MD984 | N/A | |
| 2N2060 | N/A | |
| 2N2060A | N/A | |
| 2N2060M | N/A | |
| 2N2223 | N/A | |
| 2N2223A | N/A | |
| 2N2453 | N/A | |
| 2N2453A | N/A | |
| 2N2480 | N/A | |
| 2N2480A | N/A | |
| 2N2639 | N/A | |
| 2N2640 | N/A | |
| 2N2641 | N/A | |
| 2N2642 | N/A | |
| *** CONTINUED *** | | |
| | | |

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



http://www.centralsemi.com

Product End of Life Notification

| PDN ID: | PDN01061 |
|--------------------|----------|
| Notification Date: | 1/17/17 |
| Last Buy Date: | 7/17/17 |
| Last Shipment Date | 1/17/18 |

*** CONTINUED FROM PRIOR PAGE ***

| Central Part Number | Replacement |
|---------------------|-------------|
| 2N2643 | N/A |
| 2N2644 | N/A |
| 2N2652 | N/A |
| 2N2652A | N/A |
| 2N2720 | N/A |
| 2N2721 | N/A |
| 2N2722 | N/A |
| 2N2903 | N/A |
| 2N2903A | N/A |
| 2N2913 | N/A |
| 2N2914 | N/A |
| 2N2915 | N/A |
| 2N2915A | N/A |
| 2N2916 | N/A |
| 2N2916A | N/A |
| 2N2917 | N/A |
| 2N2918 | N/A |
| 2N2919 | N/A |
| 2N2919A | N/A |
| 2N2920 | N/A |
| 2N2920A | N/A |
| 2N3726 | N/A |
| 2N3727 | N/A |
| 2N3806 | N/A |
| 2N3807 | N/A |
| 2N3808 | N/A |
| 2N3809 | N/A |
| 2N3810 | N/A |
| 2N3810A | N/A |
| 2N3811 | N/A |
| 2N3811A | N/A |
| 2N4015 | N/A |
| 2N4016 | N/A |
| 2N4854 | N/A |
| 2N4937 | N/A |
| 2N4938 | N/A |
| 2N4939 | N/A |
| 2N5793 | N/A |
| 2N5794 | N/A |
| 2N5796 | N/A |
| 2N5912 | N/A |
| 2N6502 | N/A |
| | |

*** CONTINUED ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



http://www.centralsemi.com

Product End of Life Notification

| PDN ID: | PDN01061 |
|--------------------|----------|
| Notification Date: | 1/17/17 |
| Last Buy Date: | 7/17/17 |
| Last Shipment Date | 1/17/18 |

*** CONTINUED FROM PRIOR PAGE ***

Central Part Number Replacement

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.