

**BCW65 SERIES
BCW66 SERIES**

**SURFACE MOUNT SILICON
NPN TRANSISTORS**



SOT-23 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR BCW65 and BCW66 series devices are NPN silicon transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for general purpose switching and amplifier applications.

MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Peak Collector Current
Continuous Base Current
Peak Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	<u>BCW65</u>	<u>BCW66</u>	UNITS
V_{CB0}	60	75	V
V_{CEO}	32	45	V
V_{EBO}	5.0		V
I_C	800		mA
I_{CM}	1.0		A
I_B	100		mA
I_{BM}	200		mA
P_D	350		mW
T_J, T_{stg}	-65 to +150		$^\circ\text{C}$
θ_{JA}	357		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB}=\text{Rated } V_{CEO}$			20	nA
I_{CBO}	$V_{CB}=\text{Rated } V_{CEO}, T_A=150^\circ\text{C}$			20	μA
I_{EBO}	$V_{EB}=4.0\text{V}$			20	nA
BV_{CBO}	$I_C=10\mu\text{A}$ (BCW65)	60			V
BV_{CBO}	$I_C=10\mu\text{A}$ (BCW66)	75			V
BV_{CEO}	$I_C=10\text{mA}$ (BCW65)	32			V
BV_{CEO}	$I_C=10\text{mA}$ (BCW66)	45			V
BV_{EBO}	$I_E=10\mu\text{A}$	5.0			V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$			0.3	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.7	V
$V_{BE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$			1.25	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			2.0	V
f_T	$V_{CE}=5.0\text{V}, I_C=50\text{mA}, f=20\text{MHz}$		170		MHz
C_c	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$		8.0		pF
C_e	$V_{EB}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$		50		pF


		<u>BCW65A</u>		<u>BCW65B</u>		<u>BCW65C</u>	
		<u>BCW66F</u>		<u>BCW66G</u>		<u>BCW66H</u>	
		MIN	MAX	MIN	MAX	MIN	MAX
h_{FE}	$V_{CE}=10\text{V}, I_C=100\mu\text{A}$	35	-	50	-	80	-
h_{FE}	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$	75	-	110	-	180	-
h_{FE}	$V_{CE}=1.0\text{V}, I_C=100\text{mA}$	100	250	160	400	250	630
h_{FE}	$V_{CE}=2.0\text{V}, I_C=500\text{mA}$	35	-	60	-	100	-

BCW65 SERIES
BCW66 SERIES

SURFACE MOUNT SILICON
NPN TRANSISTORS



SOT-23 CASE - MECHANICAL OUTLINE

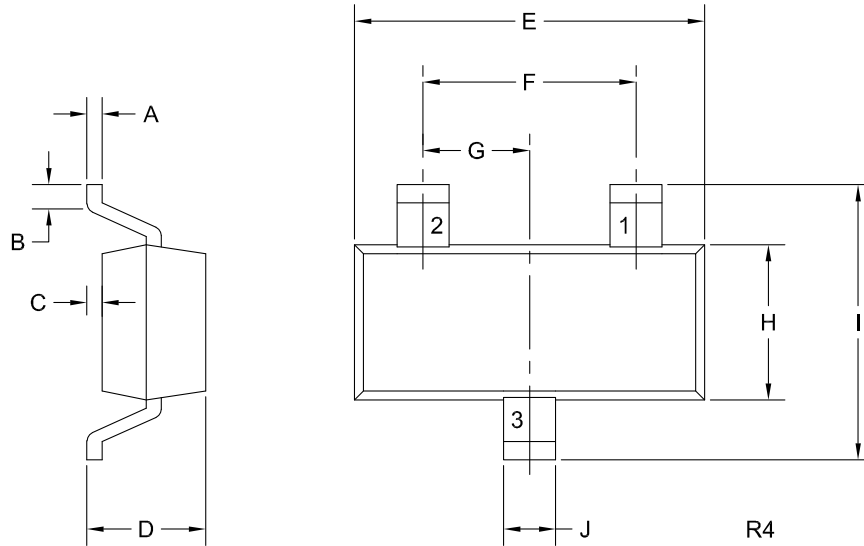

LEAD CODE:

- 1) Base
- 2) Emitter
- 3) Collector

DEVICE	MARKING CODE
BCW65A	EA
BCW65B	EB
BCW65C	EC
BCW66F	EF
BCW66G	EG
BCW66H	EH

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.044	0.89	1.12
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.104	2.10	2.64
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R4)

R4 (21-October 2021)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms