



CMBDM3590 N-CH
CMBDM7590 P-CH

**SURFACE MOUNT
 N-CHANNEL AND P-CHANNEL
 ENHANCEMENT-MODE
 COMPLEMENTARY MOSFETS**

FEMTOmini™



SOT-923 CASE

• Devices are **Halogen Free** by design

APPLICATIONS:

- Load/Power Switches
- Power Supply Converter Circuits
- Battery Powered Portable Devices

MAXIMUM RATINGS: (T_A=25°C)

Drain-Source Voltage	V _{DS}	20	V
Gate-Source Voltage	V _{GS}	8.0	V
Continuous Drain Current (Steady State)	I _D	160	140
Continuous Drain Current (t _p ≤ 5s)	I _D	200	180
Power Dissipation	P _D	125	mW
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	θ _{JA}	1000	°C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C)

SYMBOL	TEST CONDITIONS	CMBDM3590			CMBDM7590			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
I _{GSSF} , I _{GSSR}	V _{GS} =5.0V, V _{DS} =0V	-	-	100	-	-	100	nA
I _{DSS}	V _{DS} =5.0V, V _{GS} =0V	-	-	50	-	-	50	nA
I _{DSS}	V _{DS} =16V, V _{GS} =0V	-	-	100	-	-	100	nA
BV _{DSS}	V _{GS} =0V, I _D =250μA	20	-	-	20	-	-	V
V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.4	-	1.0	0.4	-	1.0	V
r _{DS(ON)}	V _{GS} =4.5V, I _D =100mA	-	1.5	3.0	-	4.0	5.0	Ω
r _{DS(ON)}	V _{GS} =2.5V, I _D =50mA	-	2.0	4.0	-	5.5	7.0	Ω
r _{DS(ON)}	V _{GS} =1.8V, I _D =20mA	-	3.0	6.0	-	8.0	10	Ω
r _{DS(ON)}	V _{GS} =1.5V, I _D =10mA	-	4.0	10	-	11	17	Ω
r _{DS(ON)}	V _{GS} =1.2V, I _D =1.0mA	-	7.0	-	-	20	-	Ω
g _{FS}	V _{DS} =5.0V, I _D =125mA	-	1.3	-	-	1.3	-	S
C _{rss}	V _{DS} =15V, V _{GS} =0V, f=1.0MHz	-	2.2	-	-	1.0	-	pF
C _{iss}	V _{DS} =15V, V _{GS} =0V, f=1.0MHz	-	9.0	-	-	12	-	pF
C _{oss}	V _{DS} =15V, V _{GS} =0V, f=1.0MHz	-	3.0	-	-	2.7	-	pF
t _{on}	V _{DD} =10V, V _{GS} =4.5V, I _D =200mA	-	40	-	-	60	-	ns
t _{off}	V _{DD} =10V, V _{GS} =4.5V, I _D =200mA	-	150	-	-	210	-	ns

Central™

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMBDM3590 and CMBDM7590 are complementary N-Channel and P-Channel Enhancement-mode silicon MOSFETs designed for high speed pulsed amplifier and driver applications. These MOSFETs offer Low r_{DS(ON)} and Low Threshold Voltage.

MARKING CODES: CMBDM3590: R
 CMBDM7590: W


FEATURES:

- Power Dissipation: 125mW
- Low Package Profile: 0.4mm
- Low r_{DS(ON)}
- Low Threshold Voltage
- Logic Level Compatibility
- Small SOT-923 Surface Mount Package


SYMBOL	CMBDM3590	CMBDM7590	UNITS
V _{DS}		20	V
V _{GS}		8.0	V
I _D	160	140	mA
I _D	200	180	mA
P _D		125	mW
T _J , T _{stg}		-65 to +150	°C
θ _{JA}		1000	°C/W

**SURFACE MOUNT
N-CHANNEL AND P-CHANNEL
ENHANCEMENT-MODE
COMPLEMENTARY MOSFETS**

SOT-923 CASE - MECHANICAL OUTLINE

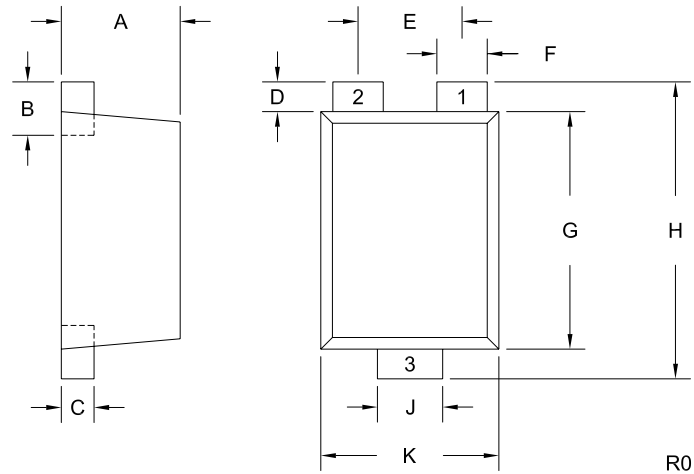

PIN CONFIGURATIONS

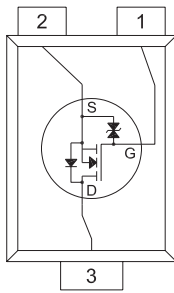


CMBDM3590

LEAD CODE:

- 1) GATE
- 2) SOURCE
- 3) DRAIN

MARKING CODE: R

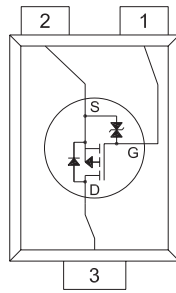

CMBDM7590

LEAD CODE:

- 1) GATE
- 2) SOURCE
- 3) DRAIN

MARKING CODE: W

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.015	0.016	0.39	0.41
B	0.004	0.010	0.10	0.26
C	0.003	0.006	0.08	0.14
D	0.002	0.006	0.05	0.15
E	0.014		0.35	
F	0.005	0.009	0.12	0.22
G	0.030	0.033	0.75	0.85
H	0.035	0.043	0.90	1.10
J	0.007	0.011	0.17	0.27
K	0.022	0.026	0.55	0.65

SOT-923 (REV: R0)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms