

CMDFSHC5-100
SURFACE MOUNT SILICON
5.0 AMP
SCHOTTKY RECTIFIER




www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMDFSHC5-100 is a 5.0 Amp silicon Schottky rectifier mounted in a durable epoxy surface mount case, utilizing glass passivated chips.

MARKING CODE: C5-100C



SMC DFN CASE

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	100	V
DC Blocking Voltage	V_R	100	V
Average Forward Current	I_O	5.0	A
Peak Forward Surge Current (8.3ms)	I_{FSM}	130	A
Operating Junction Temperature	T_J	-55 to +125	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^{\circ}\text{C}$
Typical Thermal Resistance (Note 1)	Θ_{JA}	55	$^{\circ}\text{C}/\text{W}$
Typical Thermal Resistance (Note 1)	Θ_{JL}	17	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
I_R	$V_R=100\text{V}$		500	μA
V_F	$I_F=5.0\text{A}$ (Note 2)	0.79	0.85	V
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$	180		pF

Notes: 1) FR-4 Epoxy PC Board with copper mounting pad area of 5.0mm^2
 2) Pulse test $t_p=300\mu\text{s}$, Duty Cycle=1%

CMDFSHC5-100
SURFACE MOUNT SILICON
5.0 AMP
SCHOTTKY RECTIFIER




SMC DFN CASE - MECHANICAL OUTLINE

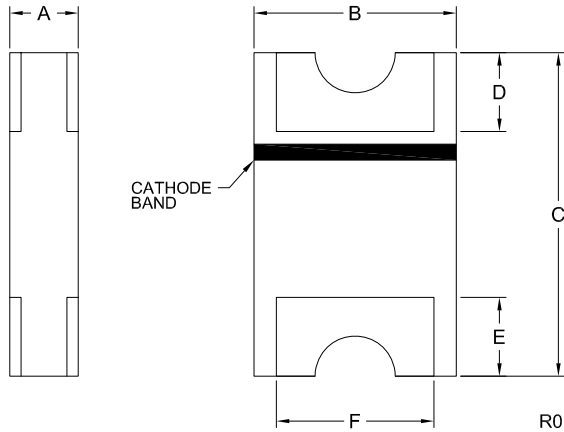

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.049	0.95	1.25
B	0.193	0.201	4.90	5.10
C	0.311	0.319	7.90	8.10
D	0.073	0.081	1.85	2.05
E	0.073	0.081	1.85	2.05
F	0.154		3.90	

SMC DFN (REV: R0)

SUGGESTED MOUNTING PADS
 (Dimensions in mm)

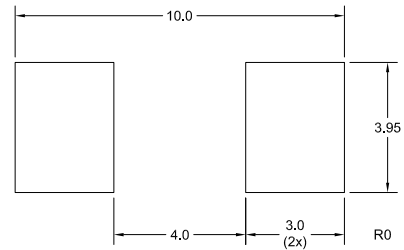




MARKING CODE: C5-100C

R2 (27-January 2021)

CMDFSHC5-100
SURFACE MOUNT SILICON
5.0 AMP
SCHOTTKY RECTIFIER



TYPICAL ELECTRICAL CHARACTERISTICS

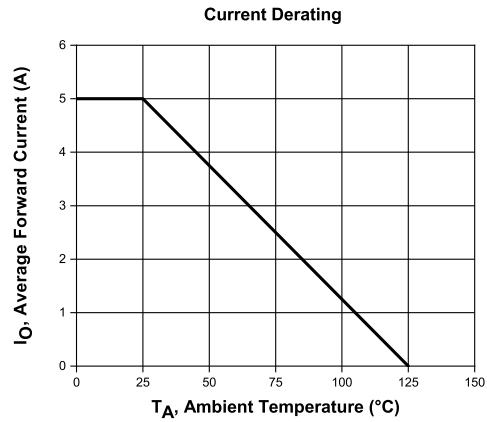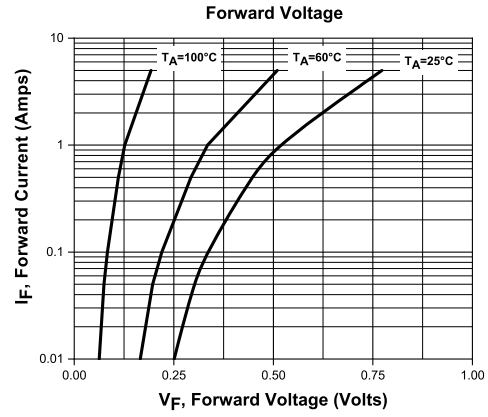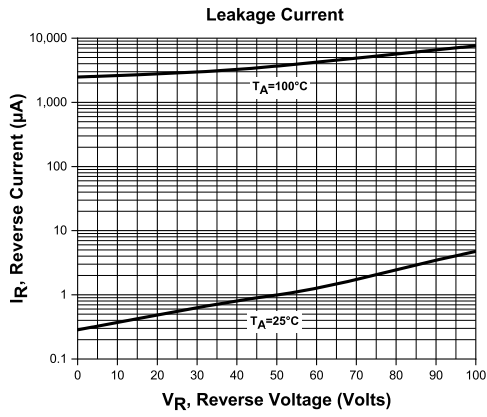

R2 (27-January 2021)

CMDFSHC5-100
SURFACE MOUNT SILICON
5.0 AMP
SCHOTTKY RECTIFIER



TYPICAL APPLICATIONS

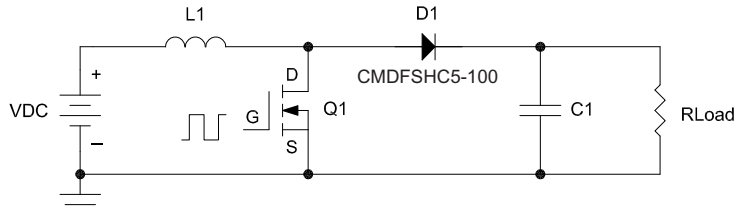


Figure 1. Boost Converter: One of the most traditional uses of the Schottky rectifier is in the boost converter, which requires a low-loss rectification element. The CMDFSH Series has been designed to highlight the main qualities of Schottky rectifiers in a space-efficient package; including a low forward voltage drop, fast turn-on time, and extremely fast recovery time. These attributes make the CMDFSH Series an excellent boost rectifier choice for any boost converter system.

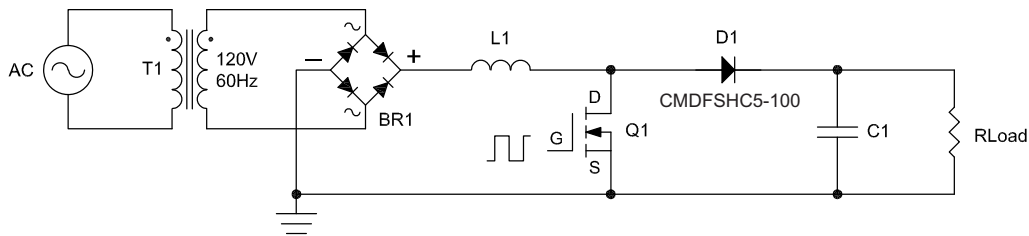


Figure 2. PFC Boost Converter: The most popular adaption of the boost converter is the power factor correction (PFC) boost converter. The power factor is the ratio of real power to actual power dissipated in a circuit. The actual power dissipation of a circuit is altered when inductive components are used in a design. This is due to the inductive reactance of the coil, which causes the current flowing through the system to lag behind the voltage in the system, causing the signals to fall out of phase. Power factor correction increases the power factor by using capacitance to create a leading current effect that compensates for the lagging current effect that is caused by the inductor.

R2 (27-January 2021)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms