

CMLDM7484

**SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET**



www.centrasemi.com



**SOT-563 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMLDM7484 consists of complementary N-Channel and P-Channel enhancement-mode silicon MOSFETs designed for high speed pulsed amplifier and driver applications. These MOSFETs offer very low  $r_{DS(ON)}$  and low threshold voltage.

**MARKING CODE: 8C7**

**FEATURES:**

- ESD Protection up to 2kV
- 350mW Power Dissipation
- Very Low  $r_{DS(ON)}$
- Low Threshold Voltage
- Logic Level Compatible
- Small, SOT-563 Surface Mount Package

**APPLICATIONS:**

- Load/Power Switches
- Power Supply Converter Circuits
- Battery Powered Portable Devices

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Drain-Source Voltage
Gate-Source Voltage
Continuous Drain Current
Power Dissipation (Note 1)
Power Dissipation (Note 2)
Power Dissipation (Note 3)
Operating and Storage Junction Temperature
Thermal Resistance (Note 1)

**SYMBOL**

$V_{DS}$	30
$V_{GS}$	8.0
$I_D$	450
$P_D$	350
$P_D$	300
$P_D$	150
$T_J, T_{stg}$	-65 to +150
$\theta_{JA}$	357

**UNITS**

V
V
mA
mW
mW
mW
$^\circ\text{C}$
$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$ )

**SYMBOL TEST CONDITIONS**

$I_{GSSF}, I_{GSSR}$	$V_{GS}=8.0\text{V}, V_{DS}=0$
$I_{DSS}$	$V_{DS}=30\text{V}, V_{GS}=0$
$BV_{DSS}$	$V_{GS}=0, I_D=10\mu\text{A}$
$BV_{DSS}$	$V_{GS}=0, I_D=100\mu\text{A}$
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$
$V_{SD}$	$V_{GS}=0, I_S=400\text{mA}$
$V_{SD}$	$V_{GS}=0, I_S=100\text{mA}$
$r_{DS(ON)}$	$V_{GS}=4.5\text{V}, I_D=200\text{mA}$
$r_{DS(ON)}$	$V_{GS}=4.5\text{V}, I_D=430\text{mA}$
$r_{DS(ON)}$	$V_{GS}=2.5\text{V}, I_D=100\text{mA}$
$r_{DS(ON)}$	$V_{GS}=2.5\text{V}, I_D=200\text{mA}$
$r_{DS(ON)}$	$V_{GS}=1.8\text{V}, I_D=75\text{mA}$
$r_{DS(ON)}$	$V_{GS}=1.8\text{V}, I_D=100\text{mA}$

**N-CH (Q1)**

MIN	MAX
-	3.0
-	1.0
30	-
-	-
0.5	1.0
0.5	1.1
-	-
-	0.46
-	-
-	0.56
-	-
-	0.73
-	-

**P-CH (Q2)**

MIN	MAX
-	3.0
-	1.0
-	-
30	-
0.5	1.0
-	-
0.5	1.1
-	-
-	-
-	1.1
-	-
-	2.0
-	-
-	3.3

**UNITS**

$\mu\text{A}$
$\mu\text{A}$
V
V
V
V
V
$\Omega$
$\Omega$
$\Omega$
$\Omega$
$\Omega$
$\Omega$
$\Omega$

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of 4.0mm<sup>2</sup>  
 (2) FR-4 Epoxy PC Board with copper mounting pad area of 4.0mm<sup>2</sup>  
 (3) FR-4 Epoxy PC Board with copper mounting pad area of 1.4mm<sup>2</sup>

CMLDM7484


**SURFACE MOUNT SILICON  
N-CHANNEL AND P-CHANNEL  
ENHANCEMENT-MODE  
COMPLEMENTARY MOSFET**




**ELECTRICAL CHARACTERISTICS - Continued: ( $T_A=25^\circ\text{C}$ )**

SYMBOL	TEST CONDITIONS	N-CH (Q1)			P-CH (Q2)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
gFS	$V_{DS}=10\text{V}$ , $I_D=100\text{mA}$	200	-	-	200	-	-	mS
$C_{rss}$	$V_{DS}=25\text{V}$ , $V_{GS}=0$ , $f=1.0\text{MHz}$	-	-	10	-	-	10	pF
$C_{iss}$	$V_{DS}=25\text{V}$ , $V_{GS}=0$ , $f=1.0\text{MHz}$	-	-	45	-	-	55	pF
$C_{oss}$	$V_{DS}=25\text{V}$ , $V_{GS}=0$ , $f=1.0\text{MHz}$	-	-	15	-	-	15	pF
$Q_{g(\text{tot})}$	$V_{DS}=15\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	0.792	-	-	-	-	nC
$Q_{g(\text{tot})}$	$V_{DS}=10\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	-	-	-	0.88	-	nC
$Q_{gs}$	$V_{DS}=15\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	0.15	-	-	-	-	nC
$Q_{gs}$	$V_{DS}=10\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	-	-	-	0.35	-	nC
$Q_{gd}$	$V_{DS}=15\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	0.23	-	-	-	-	nC
$Q_{gd}$	$V_{DS}=10\text{V}$ , $V_{GS}=4.5\text{V}$ , $I_D=1.0\text{A}$	-	-	-	-	0.128	-	nC

**SOT-563 CASE - MECHANICAL OUTLINE**

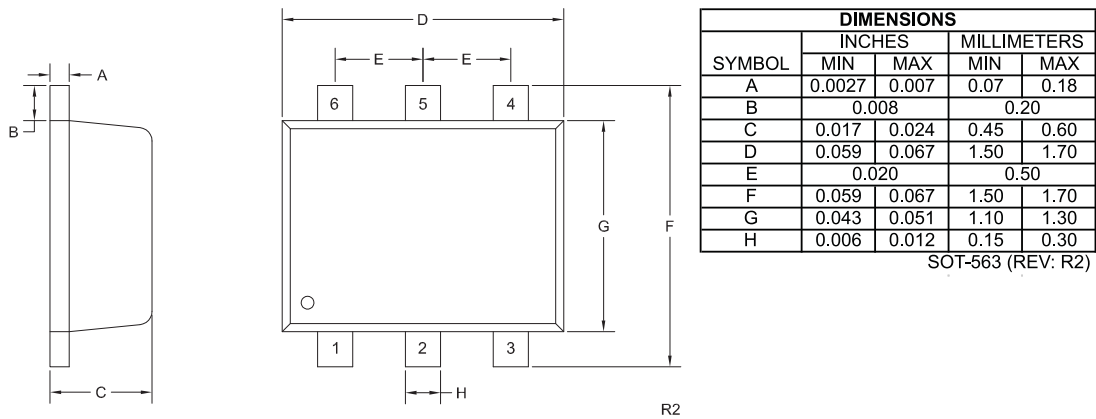

**PIN CONFIGURATION**



**LEAD CODE:**

- 1) Source Q1
- 2) Gate Q1
- 3) Drain Q2
- 4) Source Q2
- 5) Gate Q2
- 6) Drain Q1

**MARKING CODE: 8C7**

R5 (8-June 2015)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)