


CMLM3405
MULTI DISCRETE MODULE™
 SURFACE MOUNT SILICON
 HIGH CURRENT
 LOW $V_{CE(SAT)}$ NPN TRANSISTOR AND
 LOW V_F SCHOTTKY DIODE



www.centrasemi.com

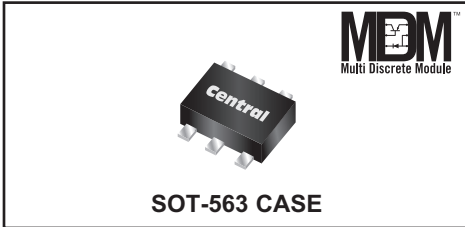

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLM3405 is a single NPN transistor and Schottky diode packaged in a space saving SOT-563 case and designed for small signal general purpose applications where size and operational efficiency are prime requirements.

- Complementary Device: **CMLM7405**
- Combination High Current Low $V_{CE(SAT)}$ Transistor and Low V_F Schottky Diode.

MARKING CODE: C53

MAXIMUM RATINGS - CASE: ($T_A=25^\circ\text{C}$)

Power Dissipation
 Operating and Storage Junction Temperature
 Thermal Resistance

SYMBOL		UNITS
P_D	350	mW
T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Θ_{JA}	357	$^\circ\text{C/W}$

MAXIMUM RATINGS - Q1: ($T_A=25^\circ\text{C}$)

Collector-Base Voltage
 Collector-Emitter Voltage
 Emitter-Base Voltage
 Continuous Collector Current
 Peak Collector Current

SYMBOL		UNITS
V_{CBO}	40	V
V_{CEO}	25	V
V_{EBO}	6.0	V
I_C	1.0	A
I_{CM}	1.5	A

MAXIMUM RATINGS - D1: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage
 Continuous Forward Current
 Peak Repetitive Forward Current, $t_p \leq 1.0\text{ms}$
 Peak Forward Surge Current, $t_p = 8.0\text{ms}$

SYMBOL		UNITS
V_{RRM}	40	V
I_F	500	mA
I_{FRM}	3.5	A
I_{FSM}	10	A

ELECTRICAL CHARACTERISTICS - Q1: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB}=40\text{V}$			100	nA
I_{EBO}	$V_{EB}=6.0\text{V}$			100	nA
BV_{CBO}	$I_C=100\mu\text{A}$	40			V
BV_{CEO}	$I_C=10\text{mA}$	25			V
BV_{EBO}	$I_E=100\mu\text{A}$	6.0			V
$V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$		20	50	mV
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$		35	75	mV
$V_{CE(SAT)}$	$I_C=200\text{mA}, I_B=20\text{mA}$		75	150	mV
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$		130	250	mV
$V_{CE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$		200	400	mV
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=100\text{mA}$		250	450	mV
$V_{BE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$			1.1	V
$V_{BE(ON)}$	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$			0.9	V

R3 (1-July 2015)

CMLM3405
MULTI DISCRETE MODULE™
 SURFACE MOUNT SILICON
 HIGH CURRENT
 LOW $V_{CE(SAT)}$ NPN TRANSISTOR AND
 LOW V_F SCHOTTKY DIODE




ELECTRICAL CHARACTERISTICS - Q1 - Continued:

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
h_{FE}	$V_{CE}=1.0V, I_C=10mA$	100		
h_{FE}	$V_{CE}=1.0V, I_C=100mA$	100	300	
h_{FE}	$V_{CE}=1.0V, I_C=500mA$	100		
h_{FE}	$V_{CE}=1.0V, I_C=1.0A$	50		
f_T	$V_{CE}=10V, I_C=50mA, f=100MHz$	100		MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$		10	pF

ELECTRICAL CHARACTERISTICS - D1: ($T_A=25^\circ C$)

I_R	$V_R=10V$		20	μA
I_R	$V_R=30V$		100	μA
BV_R	$I_R=500\mu A$	40		V
V_F	$I_F=100\mu A$		0.13	V
V_F	$I_F=1.0mA$		0.21	V
V_F	$I_F=10mA$		0.27	V
V_F	$I_F=100mA$		0.35	V
V_F	$I_F=500mA$		0.47	V
C_J	$V_R=1.0V, f=1.0MHz$		50	pF

SOT-563 CASE - MECHANICAL OUTLINE

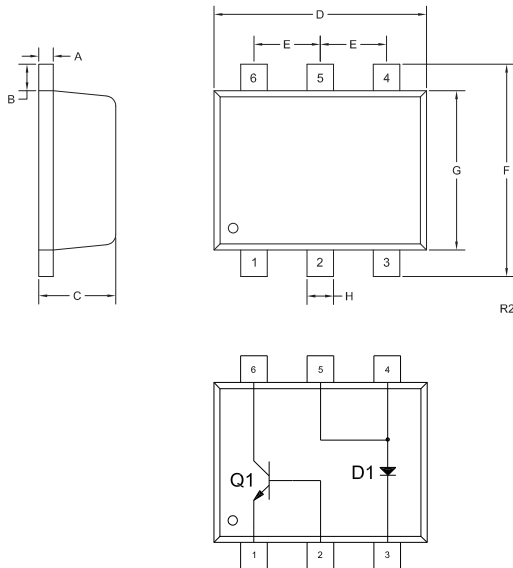

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.0027	0.007	0.07	0.18
B	0.008		0.20	
C	0.017	0.024	0.45	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.059	0.067	1.50	1.70
G	0.043	0.051	1.10	1.30
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R2)

LEAD CODE:

- 1) Emitter Q1
- 2) Base Q1
- 3) Cathode D1
- 4) Anode D1
- 5) Anode D1
- 6) Collector Q1

MARKING CODE: C53

R3 (1-July 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms