

CMSH2-20L
CMSH2-40L

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIERS
2.0 AMP, 20 AND 40 VOLT

LOW
 V_F



SMB CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMSH2-20L and CMSH2-40L 2.0 Amp surface mount low V_F Schottky rectifiers are highly reliable components designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where high efficiency is required.

**MARKING CODES: CMSH2-20L: CS220L
CMSH2-40L: CS240L**

FEATURES:

- Low forward voltage drop
- Flammability classification UL94V-0
- High current capability
- High reliability

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

| | SYMBOL | CMSH2-20L | CMSH2-40L | UNITS |
|---|----------------|-------------|-----------|--------------------|
| Peak Repetitive Reverse Voltage | V_{RRM} | 20 | 40 | V |
| DC Blocking Voltage | V_R | 20 | 40 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 14 | 28 | V |
| Average Forward Current ($T_L=105^\circ\text{C}$) | I_O | | 2.0 | A |
| Peak Forward Surge Current, $t_p=8.3\text{ms}$ | I_{FSM} | | 50 | A |
| Operating and Storage Junction Temperature | T_J, T_{stg} | -65 to +150 | | $^\circ\text{C}$ |
| Thermal Resistance | θ_{JL} | 20 | | $^\circ\text{C/W}$ |

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

| SYMBOL | TEST CONDITIONS | TYP | MAX | UNITS |
|--------|--|------|------|-------|
| I_R | $V_R=\text{Rated } V_{RRM}$ | | 0.50 | mA |
| I_R | $V_R=\text{Rated } V_{RRM}, T_A=100^\circ\text{C}$ | | 20 | mA |
| V_F | $I_F=2.0\text{A (CMSH2-20L)}$ | 0.39 | 0.40 | V |
| V_F | $I_F=2.0\text{A (CMSH2-40L)}$ | 0.34 | 0.40 | V |
| C_J | $V_R=4.0\text{V}, f=1.0\text{MHz (CMSH2-20L)}$ | 386 | | pF |
| C_J | $V_R=4.0\text{V}, f=1.0\text{MHz (CMSH2-40L)}$ | 200 | | pF |


R5 (6-September 2018)

CMSH2-20L
CMSH2-40L

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIERS
2.0 AMP, 20 AND 40 VOLT



SMB CASE - MECHANICAL OUTLINE

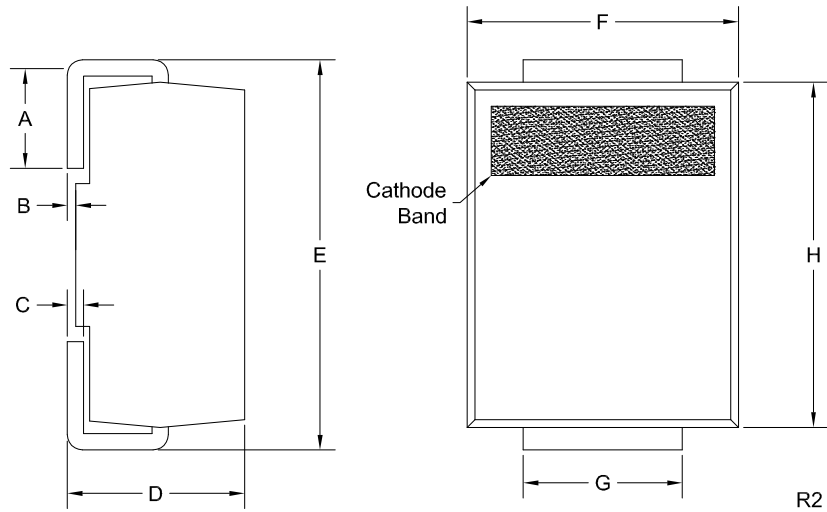

| DEVICE | MARKING CODE |
|-----------|--------------|
| CMSH2-20L | CS220L |
| CMSH2-40L | CS240L |

| SYMBOL | DIMENSIONS | | | |
|--------|------------|-------|-------------|------|
| | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.030 | 0.060 | 0.76 | 1.52 |
| B | 0.000 | 0.008 | 0.00 | 0.20 |
| C | 0.006 | 0.012 | 0.15 | 0.30 |
| D | 0.086 | 0.096 | 2.18 | 2.44 |
| E | 0.200 | 0.220 | 5.08 | 5.59 |
| F | 0.130 | 0.150 | 3.30 | 3.81 |
| G | 0.077 | 0.083 | 1.96 | 2.11 |
| H | 0.160 | 0.191 | 4.06 | 4.85 |

SMB (REV: R2)





R5 (6-September 2018)

CMSH2-20L
CMSH2-40L

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIERS
2.0 AMP, 20 AND 40 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

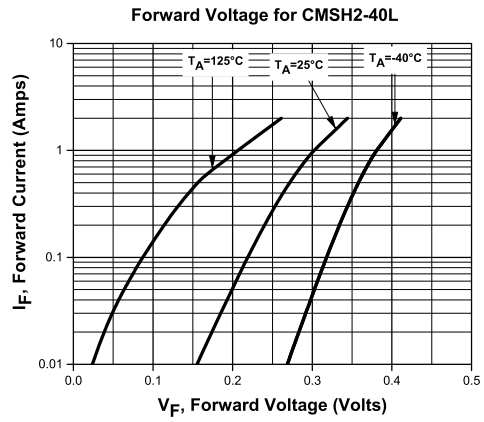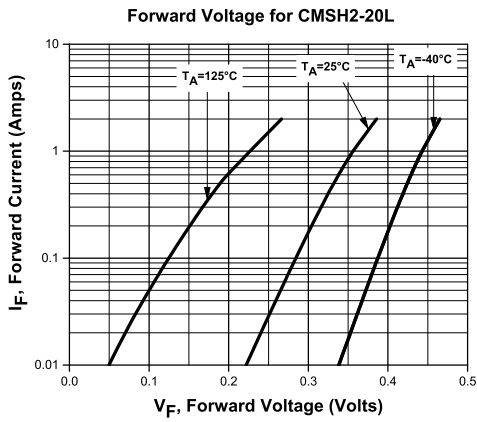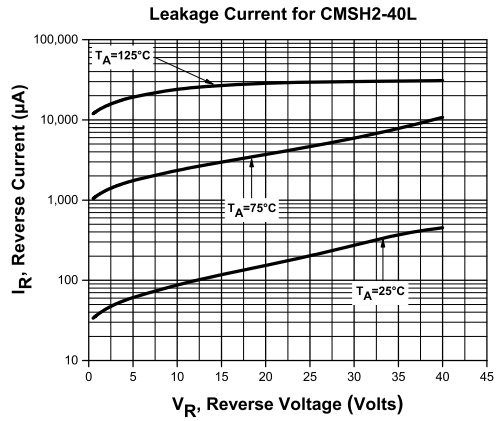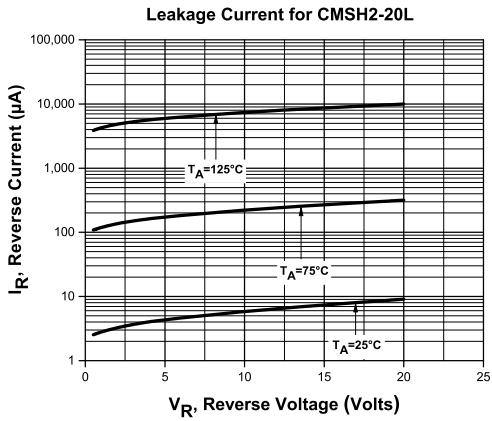




R5 (6-September 2018)

CMSH2-20L
CMSH2-40L

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIERS
2.0 AMP, 20 AND 40 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

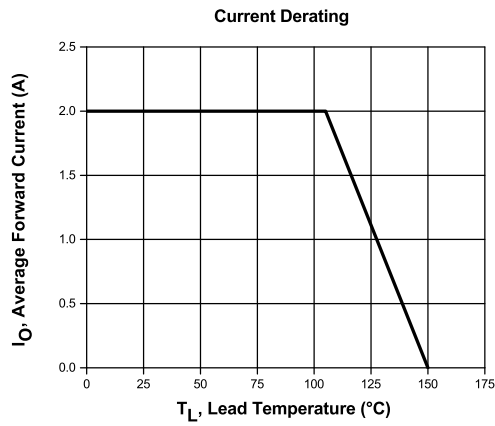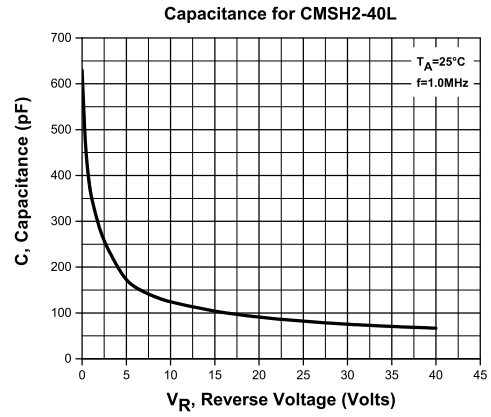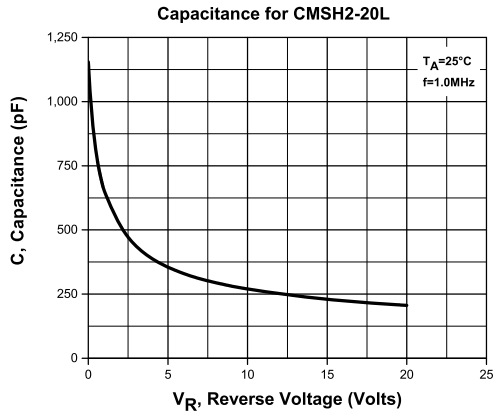

R5 (6-September 2018)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



<http://www.centrasemi.com>

Product End of Life Notification

| | |
|---------------------------|----------|
| PDN ID: | PDN01110 |
| Notification Date: | 11/08/18 |
| Last Buy Date: | 5/08/19 |
| Last Shipment Date | 11/08/19 |

Summary: The CMSH2-40L Schottky Rectifier is discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

| <u>Central Part Number</u> | <u>Replacement</u> |
|----------------------------|--------------------|
| CMSH2-40L BK | N/A, Stock Only |
| CMSH2-40L TR13 | N/A, Stock Only |

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.