

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CR6AF1GPP SERIES

GLASS PASSIVATED JUNCTION
FAST RECOVERY SILICON RECTIFIER
6.0 AMP, 100 THRU 1000 VOLTS

CASE 106

FEATURES:

- 6 Amps at $T_A = 60^\circ\text{C}$, 3/8" Lead Length
- Glass Passivated Chip
- Compression Molded Epoxy
- Superior Solvent Resistance
- 300 Amps Surge Current
- Reliable Internal Construction
- Extensive Temperature Range

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CR6AF1GPP Series types are 6.0 Amp Glass Passivated Junction Silicon Rectifiers which are high quality, well constructed, highly reliable components designed for use in all types of military, commercial, industrial, entertainment, computer, and automotive applications. **THIS DEVICE IS MANUFACTURED WITH A GLASS PASSIVATED CHIP FOR OPTIMUM RELIABILITY.**

MAXIMUM RATINGS: ($T_A = 25^\circ\text{C}$ unless otherwise noted)


	<u>SYMBOL</u>	<u>CR6AF1</u> <u>GPP</u>	<u>CR6AF2</u> <u>GPP</u>	<u>CR6AF4</u> <u>GPP</u>	<u>CR6AF6</u> <u>GPP</u>	<u>CR6AF8</u> <u>GPP</u>	<u>CR6AF10</u> <u>GPP</u>	<u>UNITS</u>
Peak Repetitive Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
DC Blocking Voltage	V_R	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	280	420	560	700	V
Average Forward Current								
@ $T_A = 60^\circ\text{C}$	I_O			6.0				A
Peak Forward Surge Current	I_{FSM}			300				A
Operating and Storage								
Junction Temperature	T_J, T_{stg}			-65 to +175				$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A = 25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
V_F	$I_F = 6.0\text{A}$		1.3	V
I_R	$V_R = \text{Rated } V_{RRM}$		10	μA
t_{rr}	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$ (100V thru 400V)		200	ns
t_{rr}	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$ (600V)		250	ns
t_{rr}	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$ (800V thru 1000V)		500	ns

(SEE REVERSE FOR MECHANICAL OUTLINE)

CASE 106 - MECHANICAL OUTLINE

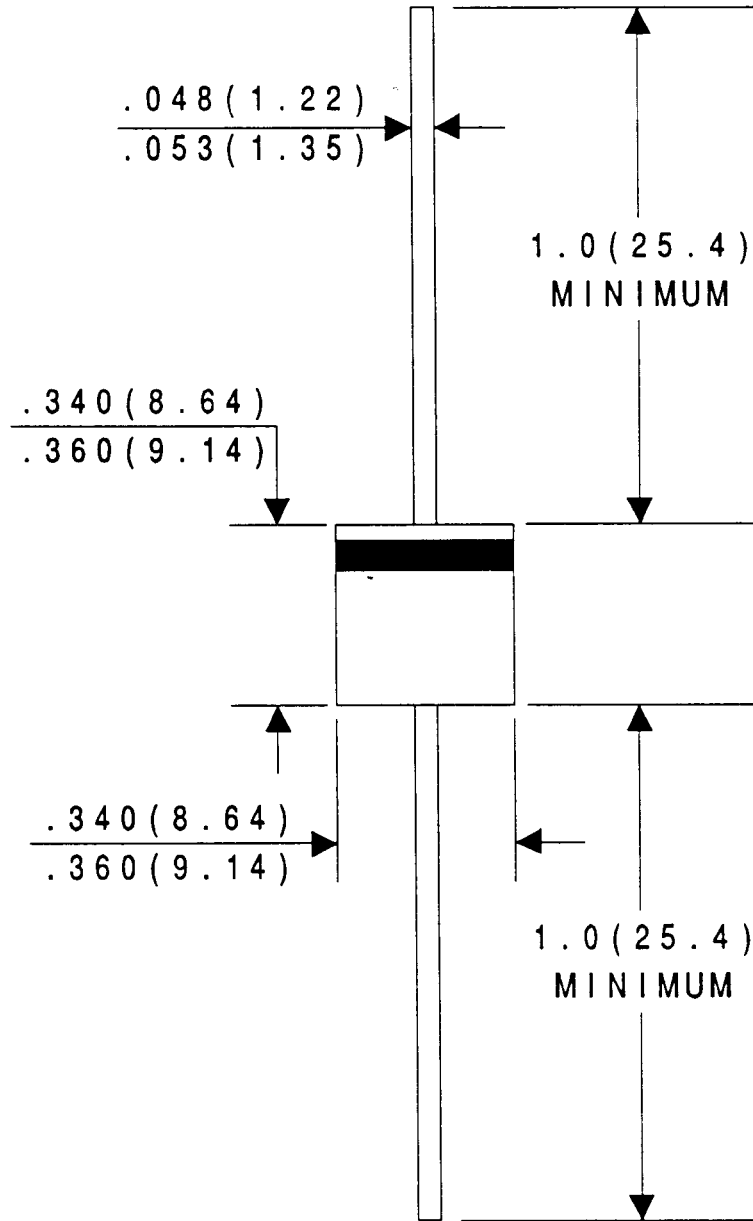

All Dimensions in Inches (mm).

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms