

**MPS8098  
MPS8099**

**NPN SILICON TRANSISTOR**



**TO-92 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR MPS8098 and MPS8099 types are NPN silicon transistors designed for general purpose audio amplifier applications.

**PNP complementary types are MPS8598 and MPS8599.**

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	MPS8098	MPS8099	UNITS
$V_{CB0}$	60	80	V
$V_{CE0}$	60	80	V
$V_{EBO}$	6.0		V
$I_C$	500		mA
$P_D$	625		mW
$T_J, T_{stg}$	-65 to +150		$^\circ\text{C}$
$\theta_{JA}$	200		$^\circ\text{C}/\text{W}$


**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$ )

SYMBOL	TEST CONDITIONS	MPS8098		MPS8099		UNITS
		MIN	MAX	MIN	MAX	
$I_{CBO}$	$V_{CB}=\text{Rated } V_{CB0}$	-	0.1	-	0.1	$\mu\text{A}$
$I_{CEO}$	$V_{CE}=60\text{V}$	-	0.1	-	0.1	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=6.0\text{V}$	-	0.1	-	0.1	$\mu\text{A}$
$BV_{CBO}$	$I_C=100\mu\text{A}$	60	-	80	-	V
$BV_{CE0}$	$I_C=10\text{mA}$	60	-	80	-	V
$BV_{EBO}$	$I_E=10\mu\text{A}$	6.0	-	6.0	-	V
$V_{CE(\text{SAT})}$	$I_C=100\text{mA}, I_B=5.0\text{mA}$	-	0.4	-	0.4	V
$V_{CE(\text{SAT})}$	$I_C=100\text{mA}, I_B=10\text{mA}$	-	0.3	-	0.3	V
$V_{BE(\text{ON})}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	0.5	0.7	-	-	V
$V_{BE(\text{ON})}$	$V_{CE}=5.0\text{V}, I_C=10\text{mA}$	-	-	0.6	0.8	V
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	100	300	100	300	
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=10\text{mA}$	100	-	100	-	
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=100\text{mA}$	75	-	75	-	
$f_T$	$V_{CE}=5.0\text{V}, I_C=10\text{mA}, f=100\text{MHz}$	150	-	150	-	MHz
$C_{ob}$	$V_{CB}=5.0\text{V}, I_E=0, f=1.0\text{MHz}$	-	6.0	-	6.0	pF
$C_{ib}$	$V_{EB}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$	-	60	-	60	pF

MPS8098  
MPS8099  
NPN SILICON TRANSISTOR



TO-92 CASE - MECHANICAL OUTLINE

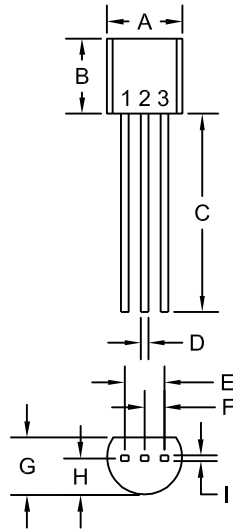

R1

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING:  
FULL PART NUMBER

R3 (2-May 2019)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)