

**CBRSDSH2-60**  
**SURFACE MOUNT**  
**2 AMP SILICON**  
**SCHOTTKY BRIDGE RECTIFIER**



[www.centrasemi.com](http://www.centrasemi.com)


**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CBRSDSH2-60 is a full wave bridge rectifier mounted in a durable epoxy surface mount case, utilizing glass passivated chips.

**MARKING: FULL PART NUMBER**

**FEATURES:**

- Low Leakage Current (70µA MAX @  $V_{RRM}$ )
- Low  $V_F$  Schottky Diodes (600mV MAX @  $I_F=2.0A$ )

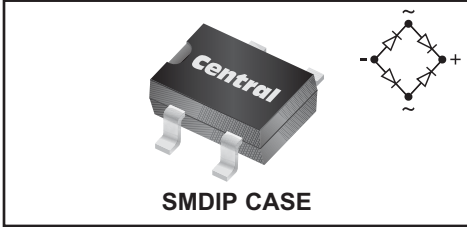

**MAXIMUM RATINGS:** ( $T_A=25^\circ C$  unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	60	V
DC Blocking Voltage	$V_R$	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Forward Current	$I_O$	2.0	A
Peak Forward Surge Current (8.3ms)	$I_{FSM}$	110	A
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-50 to +125	$^\circ C$
Typical Thermal Resistance (Note 1)	$\theta_{JA}$	40	$^\circ C/W$
Typical Thermal Resistance	$\theta_{JL}$	15	$^\circ C/W$

**ELECTRICAL CHARACTERISTICS PER DIODE:** ( $T_A=25^\circ C$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
$I_R$	$V_R=60V$	30	70	$\mu A$
$V_F$	$I_F=2.0A$		600	mV
$C_J$	$V_R=4.0V, f=1.0MHz$	300	500	pF

Notes: (1) Devices mounted on PCB with 13mm x 13mm copper pads.

**CBRSDSH2-60**  
**SURFACE MOUNT**  
**2 AMP SILICON**  
**SCHOTTKY BRIDGE RECTIFIER**



**SMDIP CASE - MECHANICAL OUTLINE**

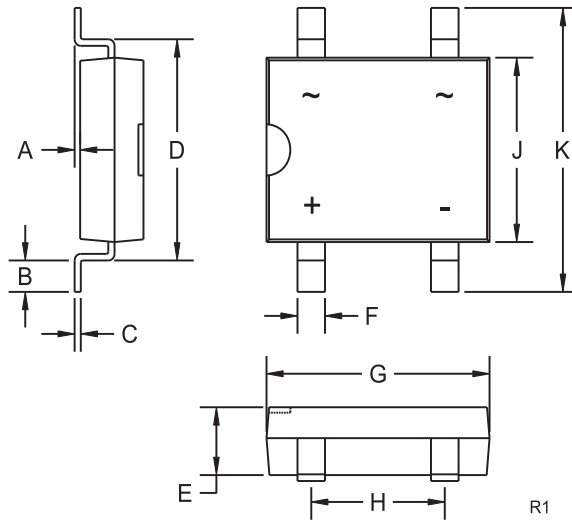

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.008	0.10	0.20
B	0.040	0.060	1.02	1.52
C	0.009		0.23	
D	0.290	0.310	7.37	7.87
E	0.086	0.098	2.18	2.49
F	0.038	0.042	0.97	1.07
G	0.316	0.335	8.03	8.51
H	0.195	0.205	4.95	5.21
J	0.245	0.255	6.22	6.48
K	0.360	0.410	9.14	10.41

SMDIP (REV: R1)

**MARKING: FULL PART NUMBER**

R1 (28-November 2011)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)