


1N5400 THRU 1N5408
SILICON RECTIFIERS
3.0 AMP, 50 THRU 1000 VOLT

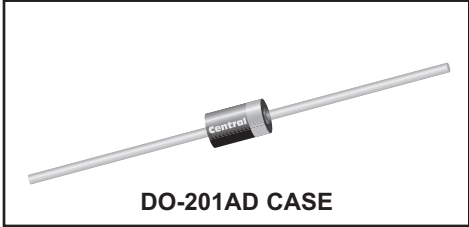

www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N5400 series types are axial lead silicon power rectifiers designed for power supply and general purpose rectifier applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

		1N									
	SYMBOL	5400	5401	5402	5403	5404	5405	5406	5407	5408	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	V
DC Blocking Voltage	V_R	50	100	200	300	400	500	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	210	280	350	420	560	700	V
Average Forward Current ($T_A=75^{\circ}\text{C}$)	I_O					3.0					A
Peak Forward Surge Current (tp=8.3ms)	I_{FSM}					200					A
Operating and Storage Junction Temperature	T_J, T_{stg}					-65 to +175					$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	V_R =Rated V_{RRM}		5.0	μA
I_R	V_R =Rated V_{RRM} , $T_A=100^{\circ}\text{C}$		500	μA
V_F	$I_F=3.0\text{A}$		1.2	V

1N5400 THRU 1N5408
 SILICON RECTIFIERS
 3.0 AMP, 50 THRU 1000 VOLT



DO-201AD CASE - MECHANICAL OUTLINE

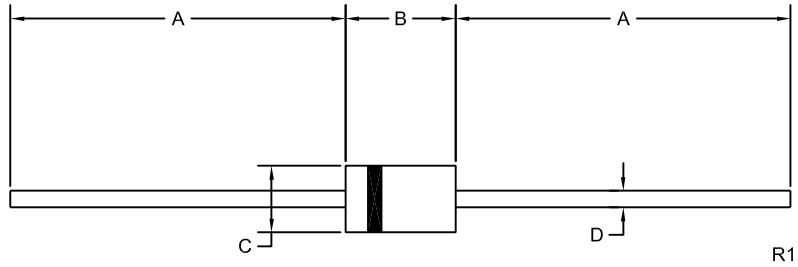

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.000	-	25.40	-
B	0.283	0.375	7.20	9.53
C	0.189	0.210	4.80	5.33
D	0.047	0.052	1.20	1.32

DO-201AD (REV: R1)

MARKING: FULL PART NUMBER

R1 (11-March 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms