
CRSH2 SERIES

SCHOTTKY BARRIER RECTIFIER 2.0 AMPS, 20 THRU 100 VOLTS





DESCRIPTION:

The CENTRAL SEMICONDUCTOR CRSH2 Series types are Schottky Barrier Rectifiers mounted in an axial lead epoxy case using a metal to silicon junction to yield a low forward voltage drop.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

	CRSH2-								
	SYMBOL	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	<u>6</u>	<u>8</u>	<u>10</u>	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	V
DC Blocking Voltage	V_{R}	20	30	40	50	60	80	100	V
RMS Reverse Voltage	V _R (RMS)	14	21	28	35	42	56	70	V
Average Forward Current (T _L =75°C) I _O					2.0				Α
Peak Forward Surge Current (8.3ms) I _{FSM}					50				Α
Operating and Storage Junction Temperature	T _J , T _{stg}			-6	5 to +12	25			°C
Thermal Resistance	$\Theta_{.1\Delta}$				35				°C/W


ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
I_{R}	V_R =Rated V_{RRM}		0.5	mA
I_{R}	V _R =Rated V _{RRM} (T _A =100°C)		20	mA
V_{F}	I _F =2.0A (20V, 30V, 40V)		0.5	V
V_{F}	I _F =2.0A (50V, 60V)		0.7	V
V_{F}	I _F =2.0A (80V, 100V)		0.85	V
CJ	V _R =4.0, f=1.0MHz	170		pF



CRSH2 SERIES


SCHOTTKY BARRIER RECTIFIER 2.0 AMPS, 20 THRU 100 VOLTS





DO-15 CASE - MECHANICAL OUTLINE

R1

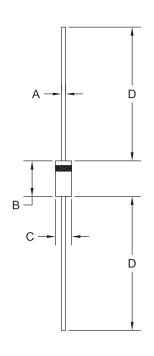

DIMENSIONS					
	INC	HES	MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	
Α	0.028	0.034	0.71	0.86	
В	0.230	0.300	5.84	7.62	
С	0.104	0.140	2.64	3.56	
D	1.000	-	25.40	-	

DO-15 (REV: R1)

MARKING: FULL PART NUMBER

R2 (24-October 2008)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- · Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)



Product End of Life Notification

PDN ID:	PDN01035
Notification Date:	8/11/16
Last Buy Date:	2/11/17
Last Shipment Date	8/11/17

Summary: The CRSH2 series of 2A Schottky rectifiers is being discontinued and is now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

Central Part Number	Replacement
CRSH2-10 BK	N/A
CRSH2-10 TR	N/A
CRSH2-2 BK	N/A
CRSH2-2 TR	N/A
CRSH2-4 BK	N/A
CRSH2-4 TR	N/A
CRSH2-4M TR	N/A
CRSH2-5 BK	N/A
CRSH2-5 TR	N/A
CRSH2-6 BK	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002