

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CS48-35B
CS48-35D
CS48-35M
CS48-35N
CS48-35P
CS48-35PB

SILICON CONTROLLED RECTIFIER
35 AMP, 200 THRU 1200 VOLTS

JEDEC TO-48 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CS48-35B series types are High Power Silicon Controlled Rectifiers designed for phase control applications.

MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	CS48 -35B	CS48 -35D	CS48 -35M	CS48 -35N	CS48 -35P	CS48 -35PB	UNITS
Peak Repetitive Off-State Voltage	$V_{\text{DRM}}, V_{\text{RRM}}$	200	400	600	800	1000	1200	V
RMS On-State Current ($T_C = 75^\circ\text{C}$)	$I_{\text{T(RMS)}}$				35			A
Peak One Cycle Surge ($t = 10\text{ms}$)	I_{TSM}				330			A
I^2t Value for Fusing ($t = 10\text{ms}$)	I^2t				545			A^2s
Peak Gate Power ($t_p = 10\mu\text{s}$)	P_{GM}				60			W
Average Gate Power Dissipation	$P_{\text{G(AV)}}$				1.0			W
Peak Forward Gate Current ($t_p = 10\mu\text{s}$)	I_{FGM}				10			A
Peak Forward Gate Voltage ($t_p = 10\mu\text{s}$)	V_{FGM}				16			V
Peak Reverse Gate Voltage ($t_p = 10\mu\text{s}$)	V_{RGM}				5.0			V
Critical Rate of Rise of On-State Current	di/dt				100			$\text{A}/\mu\text{s}$
Storage Temperature	T_{stg}			-40 to +150				$^\circ\text{C}$
Junction Temperature	T_{J}			-40 to +125				$^\circ\text{C}$
Thermal Resistance	$\theta_{\text{J-C}}$			1.0				$^\circ\text{C}/\text{W}$


ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_{\text{DRM}}, I_{\text{RRM}}$	Rated $V_{\text{DRM}}, V_{\text{RRM}}$			0.02	mA
$I_{\text{DRM}}, I_{\text{RRM}}$	Rated $V_{\text{DRM}}, V_{\text{RRM}}, T_C = 125^\circ\text{C}$			3.30	mA
I_{GT}	$V_{\text{D}} = 12\text{V}, R_{\text{L}} = 33\Omega$			40	mA
I_{H}	$I_{\text{T}} = 500\text{mA}$			100	mA
V_{GT}	$V_{\text{D}} = 12\text{V}, R_{\text{L}} = 33\Omega$			1.50	V
V_{TM}	$I_{\text{TM}} = 70\text{A}, t_p = 10\text{ms}$			2.30	V
dv/dt	$V_{\text{D}} = .67 \times V_{\text{DRM}}, T_C = 125^\circ\text{C}$	200			$\text{V}/\mu\text{s}$


(OVER)

CS48-35B SERIES RATING AND CHARACTERISTIC CURVES


RMS ON-STATE CURRENT vs. CASE TEMPERATURE

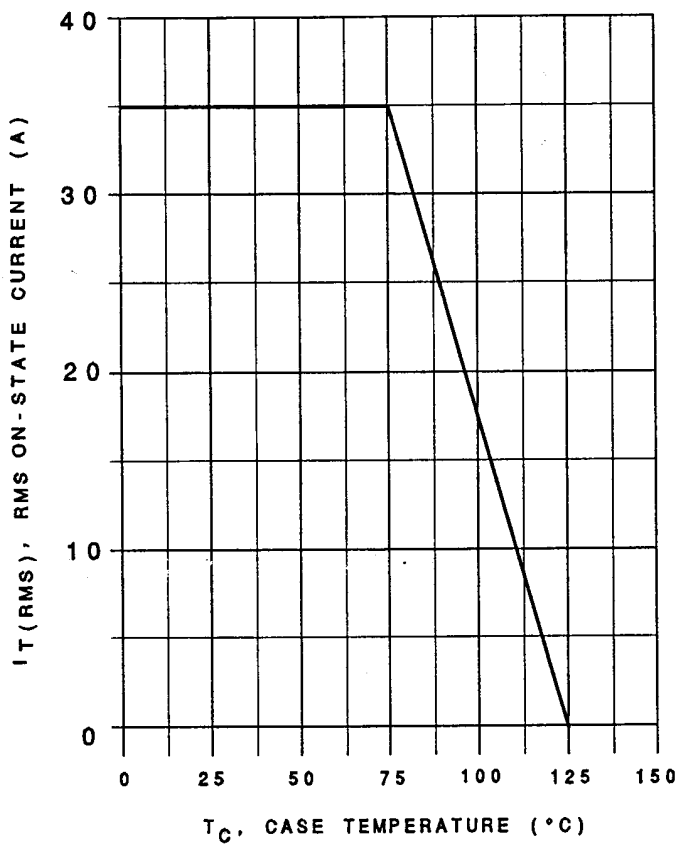

MAXIMUM ON-STATE CHARACTERISTICS

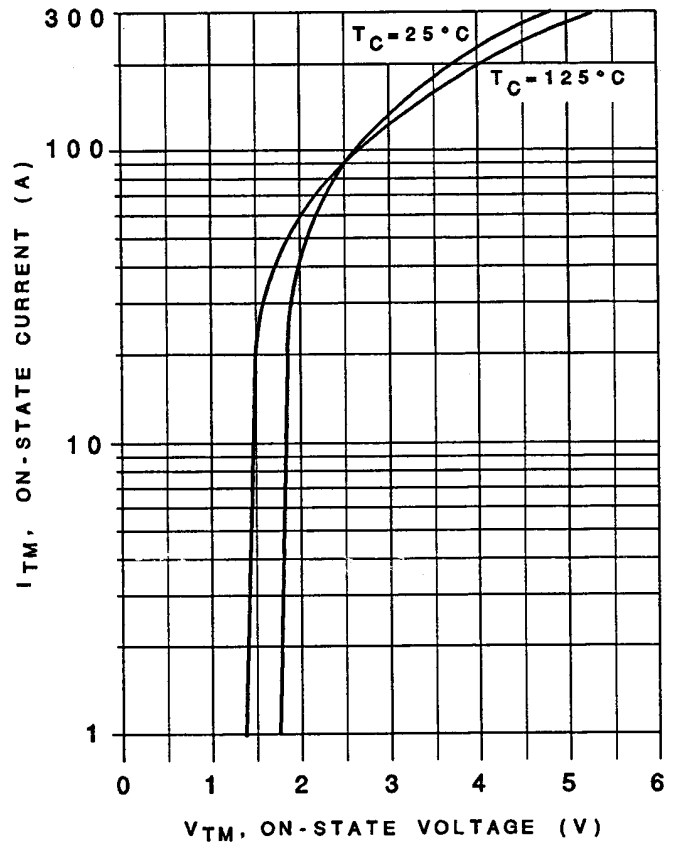

MECHANICAL DIMENSIONS

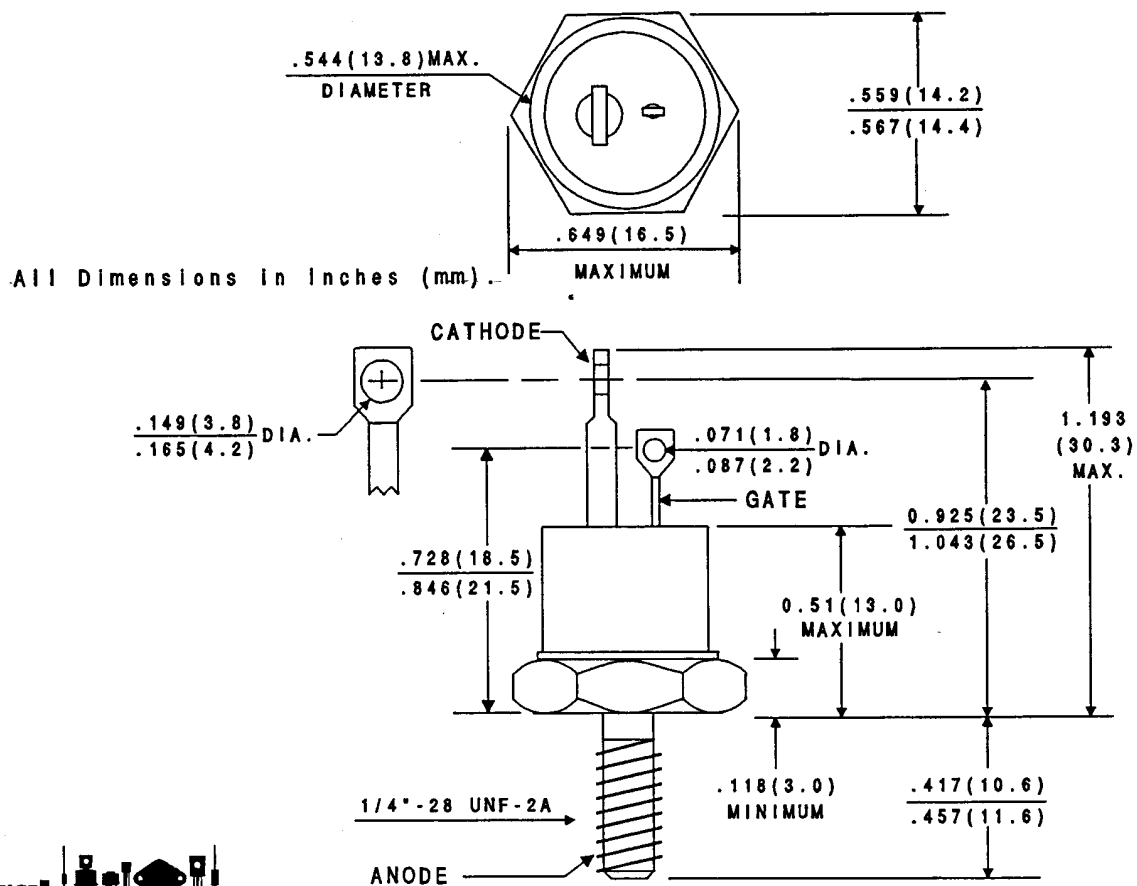

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Product End of Life Notification

PDN ID:	PDN01023
Notification Date:	4/19/16
Last Buy Date:	10/19/16
Last Shipment Date	4/19/17

Summary: All devices manufactured in the TO-48 package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

Central Part Number	Replacement
CQ48-25M	N/A
CQ48-35M	N/A
CS48-35A	N/A
CS48-35B	N/A
CS48-35D	N/A
CS48-35M	N/A
CS48-35N	N/A
CS48-35P	N/A
CS48-35PB	N/A
2N3896	N/A
2N681	N/A
2N681A	N/A
2N682	N/A
2N682A	N/A
2N683	N/A
2N683A	N/A
2N684	N/A
2N684A	N/A
2N685	N/A
2N685A	N/A
2N686	N/A
2N686A	N/A
2N687	N/A
2N687A	N/A
2N688	N/A
2N688A	N/A
2N689	N/A
2N689A	N/A
2N690	N/A
2N690A	N/A
2N691	N/A
2N691A	N/A
2N692	N/A
2N692A	N/A

*** CONTINUED ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01023
Notification Date:	4/19/16
Last Buy Date:	10/19/16
Last Shipment Date	4/19/17

*** CONTINUED FROM PRIOR PAGE ***

<u>Central Part Number</u>	<u>Replacement</u>
----------------------------	--------------------

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.