

PN4091
PN4092
PN4093

SILICON
N-CHANNEL JFETS



TO-92 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR PN4091 series devices are N-Channel silicon JFETs designed for switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL		UNITS
Gate-Drain Voltage	V_{GD}	40	V
Gate-Source Voltage	V_{GS}	40	V
Drain-Source Voltage	V_{DS}	40	V
Gate Current	I_G	10	mA
Power Dissipation	P_D	625	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	PN4091		PN4092		PN4093		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{DSS}	$V_{GS}=20\text{V}, V_{DS}=0$	30	-	15	-	8.0	-	mA
I_{SGO}	$V_{SG}=20\text{V}$	-	0.2	-	0.2	-	0.2	nA
I_{DGO}	$V_{DG}=20\text{V}$	-	0.2	-	0.2	-	0.2	nA
$I_{D(OFF)}$	$V_{DS}=20\text{V}, V_{GS}=12\text{V}$	-	0.2	-	-	-	-	nA
$I_{D(OFF)}$	$V_{DS}=20\text{V}, V_{GS}=8.0\text{V}$	-	-	-	0.2	-	-	nA
$I_{D(OFF)}$	$V_{DS}=20\text{V}, V_{GS}=6.0\text{V}$	-	-	-	-	-	0.2	nA
BV_{GSS}	$I_G=1.0\mu\text{A}$	40	-	40	-	40	-	V
BV_{DGO}	$I_D=1.0\mu\text{A}$	40	-	40	-	40	-	V
$V_{GS(OFF)}$	$V_{DS}=20\text{V}, I_D=1.0\text{nA}$	5.0	10	2.0	7.0	1.0	5.0	V
$V_{DS(ON)}$	$I_D=6.6\text{mA}, V_{GS}=0$	-	0.2	-	-	-	-	V
$V_{DS(ON)}$	$I_D=4.0\text{mA}, V_{GS}=0$	-	-	-	0.2	-	-	V
$V_{DS(ON)}$	$I_D=2.5\text{mA}, V_{GS}=0$	-	-	-	-	-	0.2	V
$r_{DS(ON)}$	$I_D=1.0\text{mA}, V_{GS}=0$	-	30	-	50	-	80	Ω
$r_{ds(on)}$	$V_{GS}=0, I_D=0, f=1.0\text{kHz}$	-	30	-	50	-	80	Ω
C_{iss}	$V_{DS}=20\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	16	-	16	-	16	pF
C_{rss}	$V_{DS}=0, V_{GS}=20\text{V}, f=1.0\text{MHz}$	-	5.0	-	5.0	-	5.0	pF
t_{on}	$I_{D(ON)}=6.6\text{mA}$	-	25	-	-	-	-	ns
t_{on}	$I_{D(ON)}=4.0\text{mA}$	-	-	-	35	-	-	ns
t_{on}	$I_{D(ON)}=2.5\text{mA}$	-	-	-	-	-	60	ns
t_{off}	$V_{GS(OFF)}=12\text{V}$	-	40	-	-	-	-	ns
t_{off}	$V_{GS(OFF)}=8.0\text{V}$	-	-	-	60	-	-	ns
t_{off}	$V_{GS(OFF)}=6.0\text{V}$	-	-	-	-	-	80	ns


R1 (23-April 2019)

PN4091
 PN4092
 PN4093

SILICON
 N-CHANNEL JFETS



TO-92 CASE - MECHANICAL OUTLINE

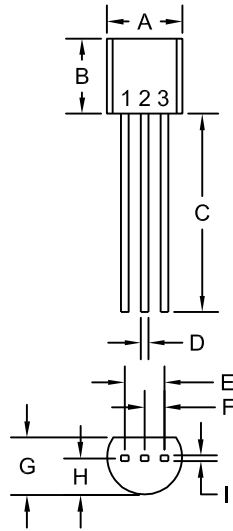

R1

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Drain
- 2) Source
- 3) Gate

MARKING:

FULL PART NUMBER

R1 (23-April 2019)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms